

# HEAT PUMP COMBI UNIT PKOM<sup>4</sup>



250 m³/h




1.300 Watt



1.300 Watt



4 – 5 persons

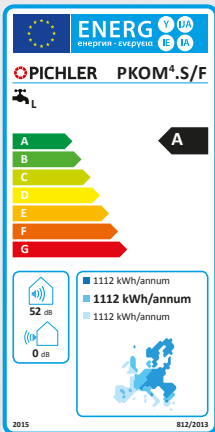

**COMFORT  
VENTILATION**



 **PICHLER**

*Systematic ventilation.*

Residential living will always be changing and developing with the times. Apart from architectural considerations, the total energy balance is of increasing importance. Legislators, ongoing development of building materials and the quality of construction are consistently raising the standard of residential construction,

thereby reducing energy consumption. Whether Passive House, EnerPHit or Near Zero Energy Building – ventilation of the living quarters is deemed essential and at the core of modern residential building design. Extension of the functionalities of a ventilation unit to include heating, cooling and hot water supply is a natural consequence!

## Product description

### *One device, 4 benefits:*

#### **Ventilating – heating – cooling – hot water**

The PKOM<sup>4</sup> heat pump combi unit with patented two-circuit heat pump system unites these four functions on a footprint of less than 0.75 m<sup>2</sup>. Controlled ventilation of living rooms will constantly ensure fresh and filtered outside air in the rooms and ensure hygienic exchange of air. The highly efficient heat recovery system is also option-

ally available as a design with recovery of waste air humidity. To prevent overly high summer temperatures in the living rooms, heat recovery may also be bypassed during cooler night hours by means of a bypass flap.

### *We differentiate between 2 versions:*

- PKOM<sup>4</sup> classic: Version with household hot water.
- PKOM<sup>4</sup> trend: Version without household hot water.

### PKOM<sup>4</sup> classic

The PKOM<sup>4</sup> classic heat pump combi unit is the preferred compact overall solution for passive house construction homes with up to 130 m<sup>2</sup> living area. The volume of household hot water will comfortably provide for a family of 4 – 5.

A controlled heat pump will in addition condition the supply air, i.e. heated or cooled on demand.

Another heat pump is used for efficient provision of household hot water. Both heat pumps may be operated in parallel to ensure uninterrupted provision of air and water.

### PKOM<sup>4</sup> trend


Household hot water storage and the associated heat pump are omitted in the PKOM<sup>4</sup> trend unit version.

The PKOM<sup>4</sup> trend heat pump combi unit is the best alternative to conventional living room ventilation units. The supply air into the living rooms will be cooled and dehumidified during summer, as needed. The supplied air will be heated in the colder months.



## Layout sketch

PKOM<sup>4</sup> CLASSIC (RIGHT-HANDED VERSION)

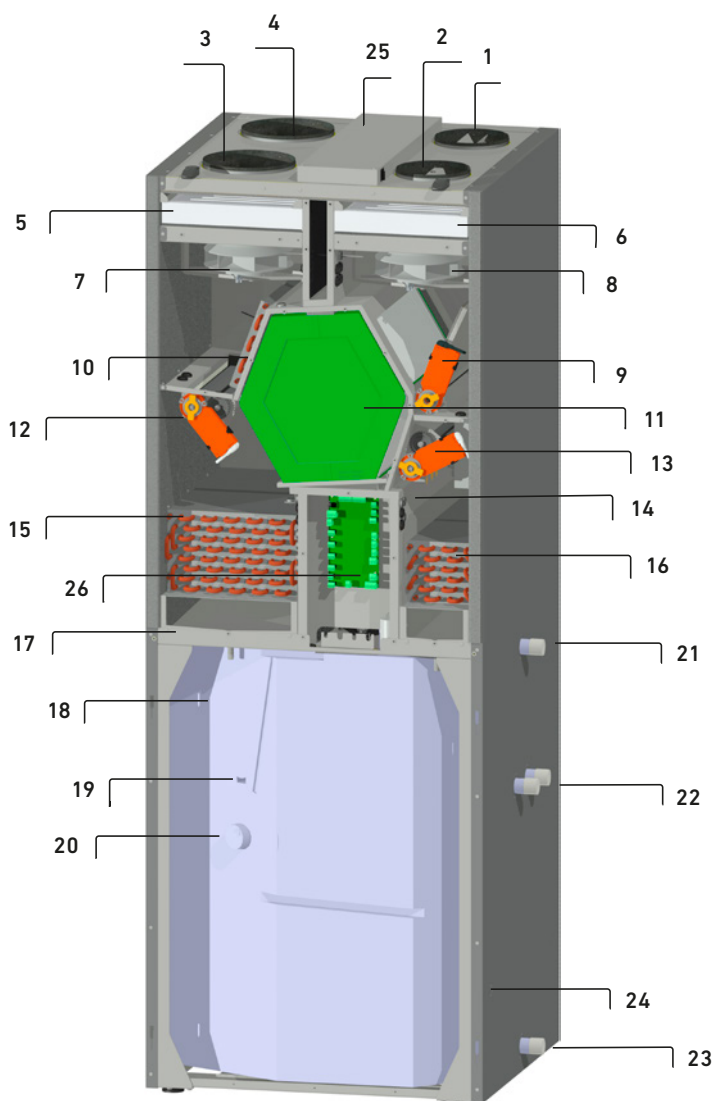


REFERRING TO ITEM 15

**Patented two-circuit  
heat pump system**

- Allows for especially efficient operation
- Both heat pumps can be operated in parallel
- Due to its large surface, it increases the efficiency of the heat pump in basic operation and increases the Seasonal Performance Factor and the \*COP of both the service water and the heat pump
- Allows for especially efficient cooling operation while generating hot water at the same time
- The waste heat that is generated during the cooling operation is recovered for the purpose of heating the service water

\*) Coefficient of Performance

PKOM<sup>4</sup> TREND (RIGHT-HANDED VERSION)

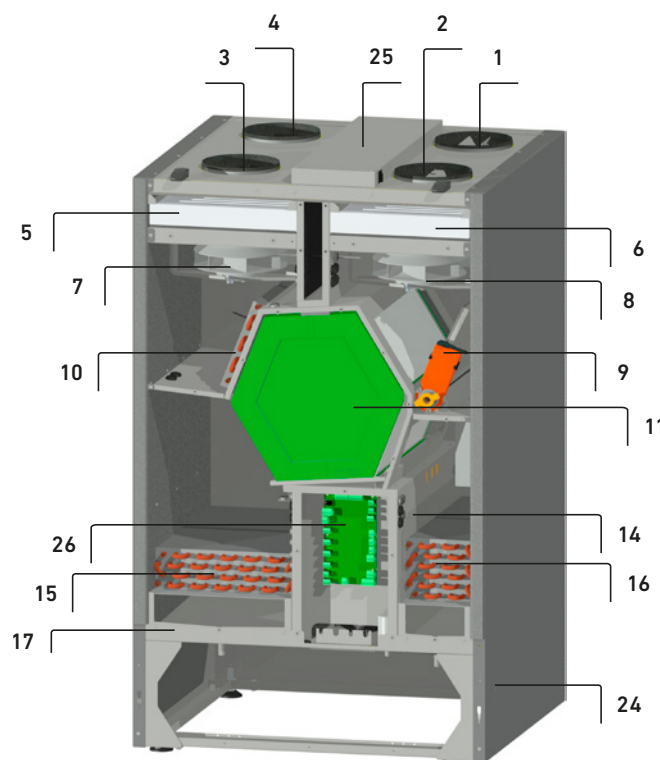

- 1 Supply air (SUP)
- 2 Extract air (ETA)
- 3 Outdoor air (ODA)
- 4 Exhaust air (EHA)
- 5 Filter ODA ISO ePM1 55%
- 6 Filter ETA ISO ePM10 75%
- 7 Outdoor air fan
- 8 Extract air fan
- 9 Bypass flap with servo motor
- 10 Pre-heater battery for outdoor air
- 11 Counterflow heat exchanger
- 12 ODA/EHA flap with servo motor
- 13 ODA/SUP flap with servo motor
- 14 Compressor in housing
- 15 Heat exchanger in exhaust air
- 16 Heat exchanger in supply air
- 17 Condensate tray
- 18 Household hot water tank
- 19 Impressed current anode
- 20 Electrical heating element with thermal cut-out
- 21 Hot water connection 1"AG
- 22 Heating battery connection 1"AG
- 23 Cold water connection 1"AG
- 24 Condensate drain
- 25 Electrical connection box with main PCB
- 26 Heat pump PCB



## Dimensions

### PKOM<sup>4</sup> CLASSIC



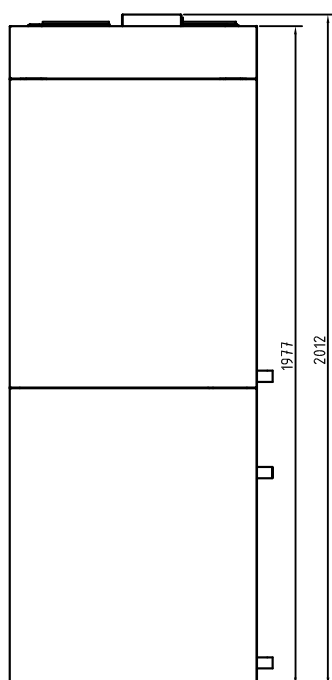


Illustration: PKOM<sup>4</sup> classic (right-handed design)

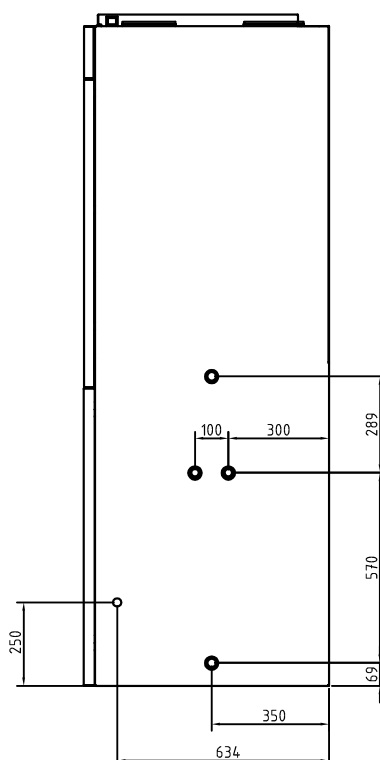

## Dimensions

### PKOM<sup>4</sup> TREND







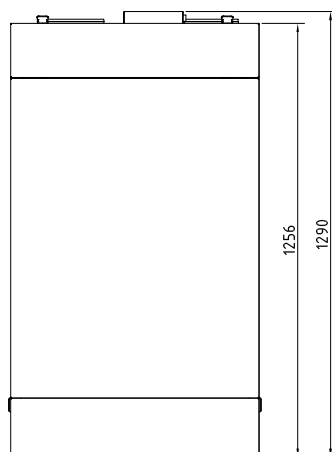


Illustration: PKOM<sup>4</sup> trend (right-handed design)

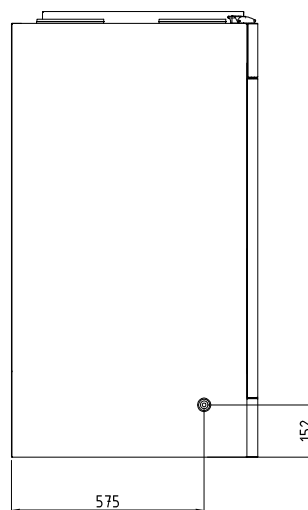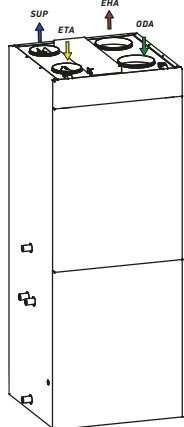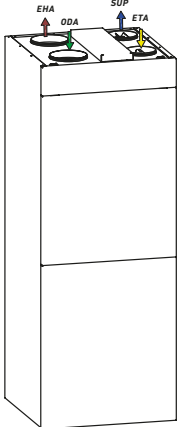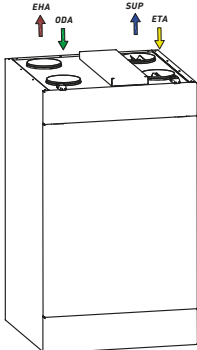

## Versions

The PKOM<sup>4</sup> heat pump combi unit is available in several versions.

Article PKOM <sup>4</sup> classic	Left-handed version	Right-handed version
with standard heat exchanger and Heating battery in the storage tank	08PKOM4LSW	08PKOM4RSW
with enthalpy exchanger* and Heating battery in the storage tank	08PKOM4LFW	08PKOM4RFW
		
Article PKOM <sup>4</sup> trend	Left-handed version	Right-handed version
with standard heat exchanger	08PKOM4LS0	08PKOM4RS0
with enthalpy exchanger*	08PKOM4LFO	08PKOM4RFO
		

\*) **TIP!** Compared to the standard heat exchanger, the enthalpy exchanger will recover not only heat from the extract air, but also a large percentage of the humidity. This humidity-heat exchanger will therefore ensure a pleasant indoor climate especially in cold months.



## Technical specifications

### VENTILATION PART WITH HEAT PUMP

	PKOM <sup>4</sup> classic	PKOM <sup>4</sup> trend
Air volume per stage	85 – 250 m <sup>3</sup> /h variable	85 – 250 m <sup>3</sup> /h variable
Ventilation stages	4	4
Max. external compression at V <sub>max</sub>	> 200 Pa	> 200 Pa
Permissible outdoor air temperature	-15 bis +40 °C	-15 bis +40 °C
Max. heating power, heat pump with A2 and V <sub>max</sub>	1.300 W	1.300 W
Max. cooling power, heat pump with A35 and V <sub>max</sub>	1.300 W	1.300 W
Refrigerant	R134a	R134a
Fill volume	1.000 g	1.000 g

VALUES AS PER EN13141-7		
Nominal air volume	175 m <sup>3</sup> /h	175 m <sup>3</sup> /h
Percent temperature change $\eta_t$ (standard/enthalpy)	88 / 84 %	88 / 84 %
Specific input power SEL (standard/enthalpy)	0,31 / 0,27 W/(m <sup>3</sup> /h)	0,31 / 0,27 W/(m <sup>3</sup> /h)
Leakage external / internal	1,64% / 0,48%	1,64% / 0,48%
COP heating at A7 incl. WRG	6,8	6,8
EER cooling at A35 incl. WRG	4,2	4,2

VALUES AS PER PHI		
Nominal air volume	157 m <sup>3</sup> /h	157 m <sup>3</sup> /h
Degree of heat provision $\eta_{WRG,eff}$ (standard/enthalpy)	88 / 85 %	88 / 85 %
Electrical efficiency	0,33 W/(m <sup>3</sup> h)	0,33 W/(m <sup>3</sup> h)
Air tightness external/internal	1,4% / 0,8%	1,4% / 0,8%

### HOT WATER PART WITH HEAT PUMP

	PKOM <sup>4</sup> classic
Storage tank volume	212 l
Heating battery (optional)	0,8 m <sup>2</sup>
Max. household hot water temperature with heat pump	55°C
Max. heating power, heat pump	1.600 W
Max. household hot water temperature with EHP	65°C
Electric-heating EHP	1.500 W
Legionella protection	yes
Refrigerant	R134a
Fill volume	1.000 g
Consumption pattern	L (Large)
Energy efficiency class	A
Energy efficiency	95 %

### ELECTRICAL

	PKOM <sup>4</sup> classic	PKOM <sup>4</sup> trend
Electrical connection	230V ~ 1/50 Hz	230V ~ 1/50 Hz
Max. power consumption [W]	2.800	750
Max. current consumption [A]	12,8	3,8
Earth leakage circuit breaker	Type A – current impulse sensitive	Type A – current impulse sensitive
Line fuse	C16A	C16A

### HOUSING

	PKOM <sup>4</sup> classic	PKOM <sup>4</sup> trend
Material	Powder coated sheet steel	Powder coated sheet steel
Duct connections supply air / extract air	Ø 160 mm	Ø 160 mm
Duct connections outdoor air / exhaust air	Ø 200 mm	Ø 160 mm
Dimensions (W x H x D)	741 x 2012 x 734 mm	741 x 1290 x 734 mm
Weight	240 kg	140 kg



## ACOUSTIC DATA

The acoustic measurements pursuant to EN 12102 refer to an airflow of 250 m<sup>3</sup>/h with 100 Pa external compression and activated heat pump.

	Measuring point	Supply air connecting piece	Outdoor air connecting piece	Extract air connecting piece	Exhaust air connecting piece	Housing emission
100 Pa	63 Hz	74,8	75,3	72,1	73,8	68,8
	125 Hz	46,4	67,9	66,2	52,0	55,2
	250 Hz	51,7	69,0	70,5	53,5	58,3
	500 Hz	43,6	56,6	58,2	45,1	47,9
	1000 Hz	33,9	52,8	56,6	40,4	35,7
	2000 Hz	25,6	53,4	52,3	27,2	30,7
	4000 Hz	14,9	43,5	47,2	14,1	12,9
	8000 Hz	1,2	26,8	33,9	1,5	13,2
	Total L <sub>WA</sub> in dB (A)	50,3	63,1	64,4	50,8	51,9

Remark: Tolerances ± 2 dB for acoustic data

## PASSIVE HOUSE CERTIFIED TO PHI CRITERIA

## Certificate

**Passive House Suitable Component**  
For cool temperate climates, valid until 31. December 2019

Category: **Compact Heat Pump System**  
Manufacturer: **Pichler G.m.b.H.**  
**9021 Klagenfurt, AUSTRIA**  
Product name: **PKOM 4**

This certificate was awarded based on the following criteria (limit values\*):  
Thermal Comfort:  $\theta_{\text{supply air}} \geq 16.5^\circ\text{C}$   
Heat Recovery of ventilation system:  $\eta_{\text{WRG,eff}} \geq 75\%$   
Electric efficiency ventilation system:  $P_{\text{el}} \leq 0.45 \text{ Wh/m}^3$   
Air tightness (internal/external):  $V_{\text{Leakage}} \leq 3\%$   
Total Primary Energy Demand (\*\*):  $PE_{\text{total}} \leq 55 \text{ kWh}/(\text{m}^2\text{a})$   
Control and calibration (\*)  
Air pollution filters (\*)  
Anti freezing strategy (\*)  
Noise emission and reduction (\*)

Measured values to be used in PHPP  
useful air flow rates 121 to 192 m<sup>3</sup>/h

**Heating**

	Test point 1	Test point 3	Test point 3	Test point 4	
Outside Air Temperature	-15	-7	2	7	°C
Thermal Output Heating Heat Pump	0.612	0.933	0.771	0.776	kW
COP number Heating Heat Pump	1.53	2.61	3.15	3.86	-
Maximum available supply air temperature with Heat Pump only(*)	33				°C

**Hot water**

	Test point 1	Test point 3	Test point 3	Test point 4	
Outside Air Temperature	-7	2	7	20	°C
Thermal Output Heat Pump for heating up storage tank	0.84	1.15	1.38	1.67	kW
Thermal Output Heat Pump for reheating storage tank	0.80	1.19	1.35	1.66	kW
COP Heat Pump for heating up storage tank	2.28	2.97	3.34	3.94	-
COP Heat Pump for reheating storage tank	2.02	2.88	3.10	3.76	-
Average storage tank temperature	45				°C
Specific storage heat losses	1.51				W/K
Exhaust air addition (if applicable)	200				m <sup>3</sup> /h

(\*) detailed description of criteria and key values see attachment.  
(\*\*) for heating, domestic hot water (DHW), ventilation, auxiliary electricity in the reference building, explanation see attachment.  
(\*\*\*) All key values of heat pump were measured with enthalpy (humid) heat exchanger. The dry heat recovery was measured, too and is shown here alternatively.  
All other key values are valid respectively for dry heat recovery, too.

0875ch03

[www.passivehouse.com](http://www.passivehouse.com)

Passivhaus Institut  
Dr. Wolfgang Feist  
64283 Darmstadt  
GERMANY

**Heat Recovery by enthalpy heat exchanger(\*\*\*)**  
 $\eta_{\text{WRG,eff}} = 85\%$

alternative:  
**Dry Heat Recovery by heat exchanger(\*\*\*)**  
 $\eta_{\text{WRG,eff}} = 88\%$

**Electric efficiency**  
0.33 Wh/m<sup>3</sup>

**Air tightness**  
 $V_{\text{leak, internal}} = 0.8\%$   
 $V_{\text{leak, external}} = 1.4\%$

**Frost protection**  
down to -15 °C


**Total Primary Energy Demand (\*\*)**  
**45 kWh/(m<sup>2</sup>a)**

**CERTIFIED COMPONENT**  
Passive House Institute


The current certificate can be downloaded at:  
[www.pichlerluft.at/heat-pump-combination-unit.html](http://www.pichlerluft.at/heat-pump-combination-unit.html)



## Functional diagram PKOM<sup>4</sup> classic

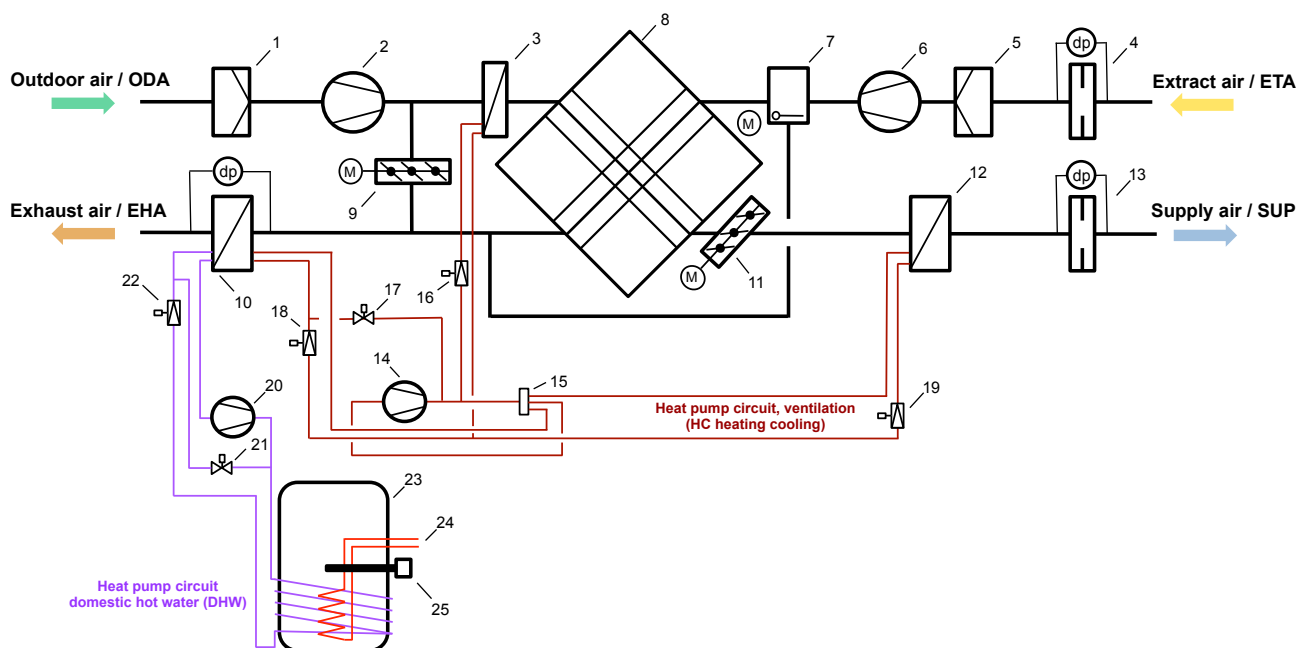

## Functional diagram PKOM<sup>4</sup> trend

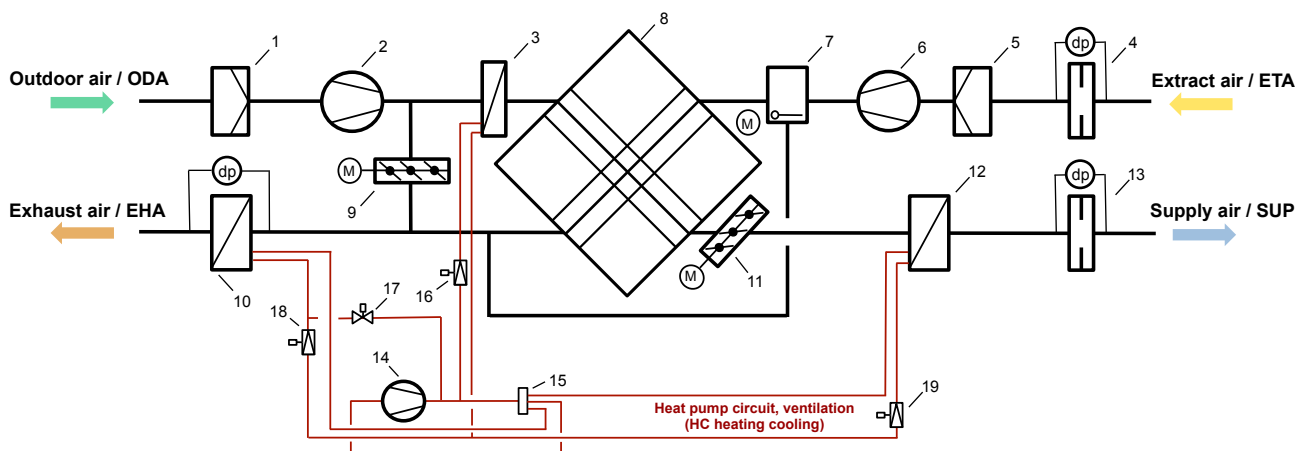

- 1 Filter ODA ISO ePM1 55%
- 2 Outdoor air fan
- 3 Pre-heater battery for outdoor air
- 4 Air volume measurement, extract air
- 5 Filter ETA ISO ePM10 75%
- 6 Extract air fan
- 7 Bypass flap with servo motor
- 8 Counterflow heat exchanger
- 9 Outdoor air/exhaust air flap with servo motor
- 10 Heat exchanger in exhaust air
- 11 Outdoor air/exhaust air flap with servo motor
- 12 Heat exchanger in supply air
- 13 Air volume measurement, supply air
- 14 Compressor with frequency converter (HC circuit)

- 15 4-way switching valve (HC circuit)
- 16 Control valve pre-heating battery (HC circuit)
- 17 Solenoid valve, defrosting (HC circuit)
- 18 Expansion valve, heating (HC circuit)
- 19 Expansion valve, cooling (HC circuit)
- 20 Compressor circuit (DHW circuit)
- 21 Solenoid valve, defrosting (DHW circuit)
- 22 Expansion valve (DHW circuit)
- 23 Domestic hot water storage tank
- 24 Heating battery in domestic hot water storage tank
- 25 Electrical heating, domestic hot water


DHW = Circuit for domestic hot water  
HC = Circuit for supply air (heating / cooling)





## Total heating output

AT 160 M<sup>3</sup>/H

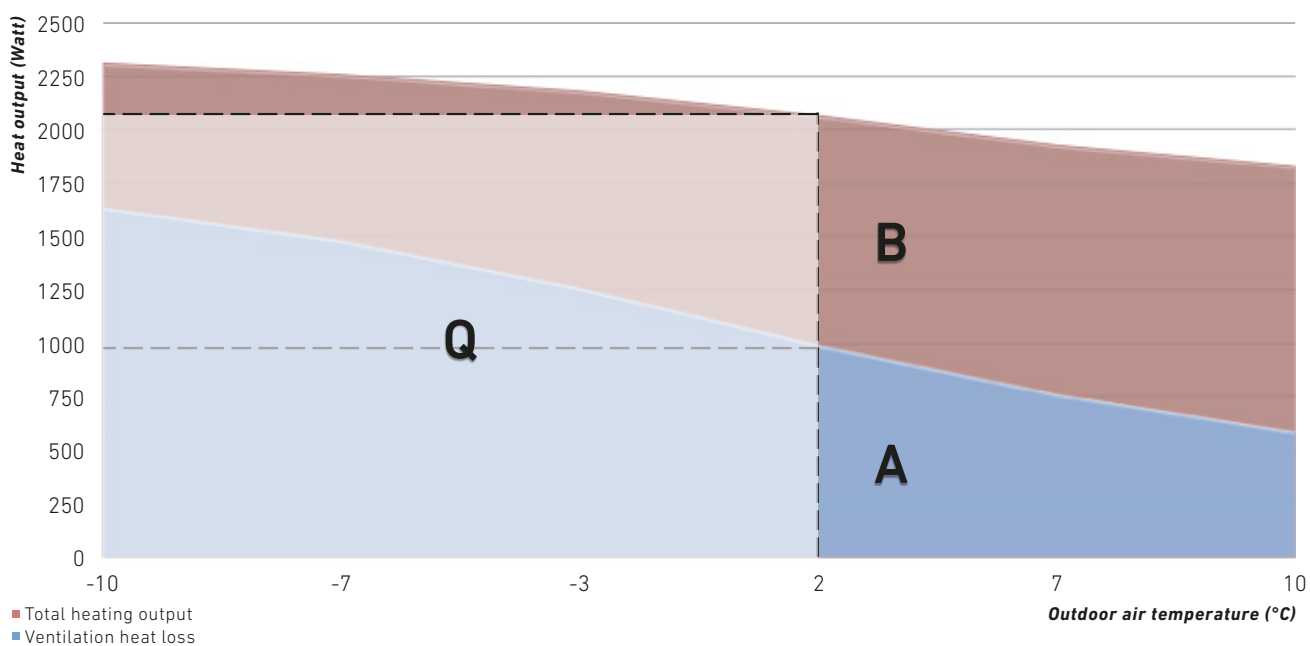

*The full heating output Q (share A + B) will be released into the outdoor air at the given air volume flow.*

*The ventilation heat loss (share A) corresponds to the power required to return the outdoor air to indoor air conditions.*

*Share B is additionally available for actively heating the supply air.*



## Data in accordance with EU Regulations

### HOUSEHOLD HOT WATER HEAT PUMP PKOM<sup>4</sup> CLASSIC

The heat pump fulfills the requirements of the Ecodesign Directive, in accordance with EU Regulations 812/813-2013.

**Specific energy consumption:** Efficiency class A is achieved with an outdoor air temperature of +7°C (+6°C wet bulb).

#### Product fiche

#### Heat pump combi unit: PKOM<sup>4</sup>.S/F


supplier's name or trade mark	J. Pichler GmbH
model identifier	PKOM <sup>4</sup> .S/F
declared load profile	L
water heating energy efficiency class	A
water heating energy efficiency class	95%
the annual electricity consumption in kWh in terms of final energy	1112 kWh
temperature settings, as placed on the market	55 °C
the sound power level LWA in dB, indoors	52 dB(A)
able to work only during off-peak hours	no
precautions when assembled, installed or maintained	see operating and installation instructions
Storage volume in litres	212 l

#### Filter change

The filters are to be replaced as soon as the command to replace the filters appears on the display of the operator control unit (marked red in the picture alongside).

#### CAUTION:

If the filters are not changed regularly, the system can not work efficiently and the power consumption increases.




Operator control unit "TOUCH"

#### Waste disposal

Units that are no longer in working order have to be dismantled and properly disposed of by a specialized company via suitable collection centres and in compliance with the waste electrical and electronic equipment ordinance (WEEE), which provides for ratification of community law, directive 202/95/EC (RoHS) and the directive 2002/96/EC (the WEEE directive).

Information based on the current state of knowledge of EU Regulation 812/2013  
Download from: [www.pichlerluft.at](http://www.pichlerluft.at)

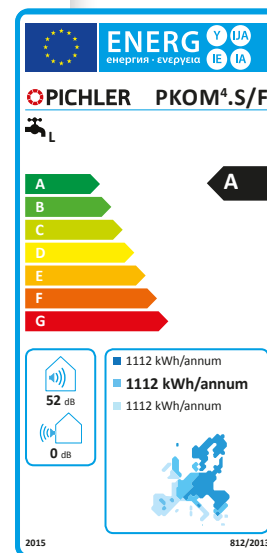

Responsible for the content: J. Pichler Gesellschaft m.b.H.  
Photos: Archiv J. Pichler Gesellschaft m.b.H. | Text: J. Pichler Gesellschaft m.b.H.  
All rights reserved | All photos are symbolic photos | Subject to change without notice | Version: 03/2016 db

**PICHLER**  
Systematic ventilation.

J. PICHLER  
Gesellschaft m.b.H.  
office@pichlerluft.at  
www.pichlerluft.at

ÖSTERREICH  
9021 KLAGENFURT  
AM WÖRTHERSEE  
Karlweg 5  
T +43 (0)463 32769  
F +43 (0)463 37548

ÖSTERREICH  
1100 WIEN  
Doerenkampgasse 5  
T +43 (0)1 6880988  
F +43 (0)1 6880988-13

Sales offices in  
Slovenia and Serbia.  
Sales partners in  
Germany, Switzerland  
and Italy.

Download from: [www.pichlerluft.at](http://www.pichlerluft.at)





TOUCH control unit



Modbus/KNX Gateway

## Operation

The PKOM<sup>4</sup> heat pump combi unit can offer the user many different configurations. Switch-over from summer to winter and back may be manually or automatic. Scheduled operation depending on time of day or week will allow setting of different air volumes and room temperatures. Active cooling with the heat pump may be activated or deactivated as desired. The electrical heater may also be switched on should the requirement for hot water increase on occasion.

### TOUCH CONTROL UNIT

Operation is simple and intuitive via touch display. The most important settings and readings are very easy to make. The integrated room sensor is also used to monitor and control the room temperature.

#### Advantages of controlling:

- Automatic summer and winter adjustment
- Holiday function
- Individually adjustable air volumes
- Programs based on time of day and day of the week
- Legionella protection
- Additional functions for solar and additional heater
- Energy balancing
- CO<sub>2</sub> and humidity control
- Eco-Mode (Smart Grid Ready / PV Ready)

#### Control unit dimensions:

(w x h x d) 110 x 84 x 25 mm

Cable: Telephone installation wiring JY(ST)Y 2x2x0.8

Max. installation length < 100 m

### EASY OPERATION WITH THE PICHLER APP

User-friendly: the heat pump combination unit can be operated easily with our free smartphone app for iOS and Android, whether you are at home or out and about:



### REMOTE ACCESS / PICHLER CONNECT

Operational safety: Pichler customer service automatically receives information on your heat pump combination unit in the event of a malfunction. Remote access facilitates a prompt response with minimal effort.



### BUILDING AUTOMATION

Connection to a building automation via integrated Modbus RTU interface. Optionally, a gateway for the KNX bus system is also available.

### MODBUS/KNX GATEWAY

The Modbus/KNX gateway allows for the connection of the heat pump combi unit to a KNX bus system. In this process, the gateway serves as a connective link between the two bus systems. Note that the master is always on the Modbus. On the KNX side, however, it responds like a common KNX TP-1 unit. This makes it possible to centrally control and monitor the ventilation unit by a KNX system. In order to facilitate the configuration, ETS template projects are provided for download for the heat pump combi units.

**Dimensions:** L x W x D = 18 x 100 x 60 mm

**Mounting:** top hat rail or wall

**Permissible ambient temperature:** -5 to 45 °C

**Permissible humidity:** 5 – 93 % non-condensing

**Protection class:** IP20

**Voltage:** 12...24V DC

**Interfaces:** Ethernet, EIA-485, KNX-TP1

Item	Item number
Modbus/KNX Gateway	08KNXGAB






Spare filter



Duct heating battery 1200 watt

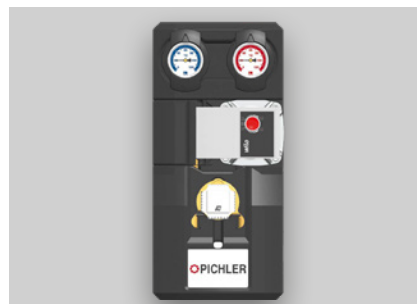



Heating circuit module DN20

## Accessories

### SPARE FILTER

will ensure perfect hygiene and air quality given regular replacement, also proper functionality and efficient operation of the unit.

Item		Item number
 Filter ETA ISO ePM10 75% (Extract air)	synthetic	40LG050280
 Filter ODA ISO ePM1 55% (Outdoor air)	glass fibre	40LG050290

### DUCT HEATING BATTERY 1200 WATT

**Greater power on request.** With integrated temperature limiter and thermal protection. The controller is the PKOM<sup>4</sup> heat pump combi unit. It will only be activated if the heat pump fails to achieve the desired supply air temperature for extended periods.

Item	Item number
Duct heating battery PKOM <sup>4</sup>	08CV16121MTXL
Duct temperature sensor NTC	40LG041920

Max. power	1200 W
Output control	0 – 10 V
Minimum air volume	110 m <sup>3</sup> /h
Duct connection	Ø 160 mm
Installation length	375 mm

### HEATING CIRCUIT MODULE DN20

for connecting a small heating circuit (e.g. towel dryer) to the household hot water storage tank of the PKOM<sup>4</sup> classic heat pump combi unit.

Item	Item number
PKOM <sup>4</sup> heating circuit module	08PKOM4HBK33
Wall bracket set	08PKOM4WHHBK33

Pump	Wilo-Yonos PARA RS15/6
Gravity reverse brake	200 mmWs
3-way mixer	Setting range 20 – 50°C
Connections, Inlet (bottom)	1" AG, flat seal
Connections, outlet (top)	3/4" IG
Centre spacing	90 mm
W x H	180 x 385 mm

### TEMPERATURE SENSOR

for the temperature measurement and heating control of an additional room in connection with the heating circuit module. The sensor in the surface-mounted housing is suitable for wall mounting.

Item	Item number
Room-temperature sensor	07RTF49357

Colour	white
Type	NTC 10 kOhm
Reference signal	0 – 10 V
Dimensions W x H x D	85 x 85 x 35 mm






Room sensor (temperature, humidity or CO<sub>2</sub> sensor)



Humidity sensor duct installation

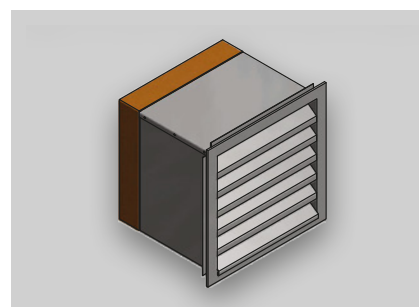

Wall duct

## HUMIDITY SENSOR

for ventilation control to suit requirements. The heat pump combi unit will automatically increase or reduce the air volumes depending on the humidity of the air in the room. The sensor in the surface-mounted housing is suitable for wall mounting.

Item	Item number
Humidity sensor	07RHF49360
Colour	white
Measuring range	0 – 100 % RH
Reference signal	0 – 10 V
Dimensions W x H x D	85 x 85 x 35 mm

## CO<sub>2</sub> SENSOR

for ventilation control to suit requirements. The heat pump combi unit will automatically increase or reduce the air volumes depending on the quality of the air in the room. The sensor in the surface-mounted housing is suitable for wall mounting.

Item	Item number
CO <sub>2</sub> sensor	07RCO248330
Colour	white
Measuring range	0 – 2000 ppm
Reference signal	0 – 10 V
Dimensions W x H x D	85 x 85 x 35 mm

## HUMIDITY SENSOR DUCT INSTALLATION


for ventilation control to suit requirements. The heat pump combi unit will automatically increase or reduce the air volumes depending on the humidity of the air in the room. The sensor is installed in the exhaust air duct.

Item	Item number
Humidity sensor duct installation	07KTRHF49337
Measuring range	10 – 90 % RH
IP protection class	IP 10
Supply voltage	24VAC
Dimensions	Ø 18 – 200mm


## WALL DUCT

The thermally insulated and soundproof wall duct with a stainless steel weather protection grille and insulation in the rear area is used as an acoustically optimised outdoor or exhaust air element. A 10 x 10 mm mesh grille is integrated into the wall duct. The A-evaluated sound pressure level is reduced by app. 6 dB(A) on the outdoor and exhaust air connecting piece. An approximate cut-out of 350 x 350 mm has to be established for the installation.

Item	Dimensions W x H x D	Item number
Wall duct Ø 200 mm	350 x 350 x 314,4 mm	08PKOMMLA200
Wall duct Ø 160 mm	350 x 350 x 314,4 mm	08PKOMMLA160

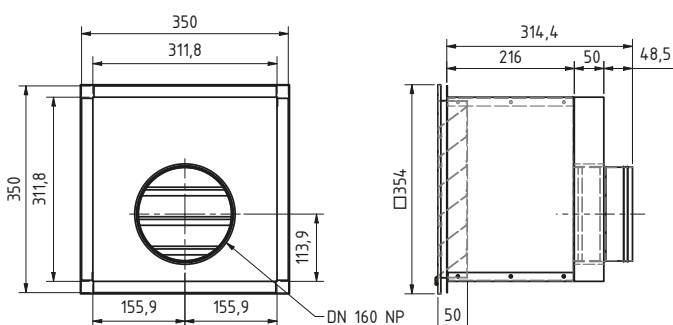

Wall duct Ø 160 mm

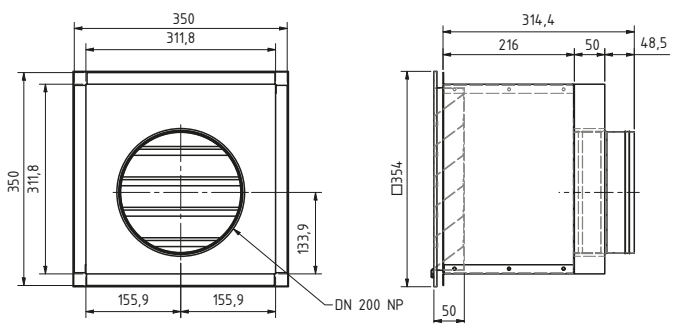

Wall duct Ø 200 mm





Air humidification unit

### AIR HUMIDIFICATION UNIT


A compact, automatic air humidification unit for active supply air humidification, for living rooms and lounges, a patented and certified system suitable for installation in ventilation systems, only in combination with a PKOM<sup>4</sup> heat pump combination device. The compact air humidification unit works according to the natural evaporation principle and ensures constant and optimal humidity in the supply air. The build-up of germs and bacteria in the unit is permanently and effectively prevented through the continuous, automatic monitoring of UVC disinfection and time-controlled water replacement. A reverse osmosis unit is integrated into the water supply line in order to effectively protect the unit against calcification. Downstream of the air humidification unit, the supply air is heated again to the required air temperature by an electric duct heater.

### Technical specifications:

- **Airflow volume:** max. 350 m<sup>3</sup>/h
- **Pressure loss:** max. 72 Pa
- **Air humidity:** 4.5 – 11.5 g/m<sup>3</sup> (with 4 optional levels)
- **Evaporation performance:** max. 2.5 l/h
- **Air connection:** Ø 160 mm
- **Water connection:** 3/4"
- **Waste flow connection:** Ø 40 mm
- **Empty weight / operating weight:** 25 / 28 kg
- **Voltage:** 230 V / 50 Hz
- **Dimensions:** W x H x D = 510 x 385 x 360 mm
- **Electrical power consumption:** 100 W

Item	Item number
Air humidification unit (right-hand version)	08LBE250ARO
Air humidification unit (left-hand version)	08LBE250ALO

### Schematic for installation

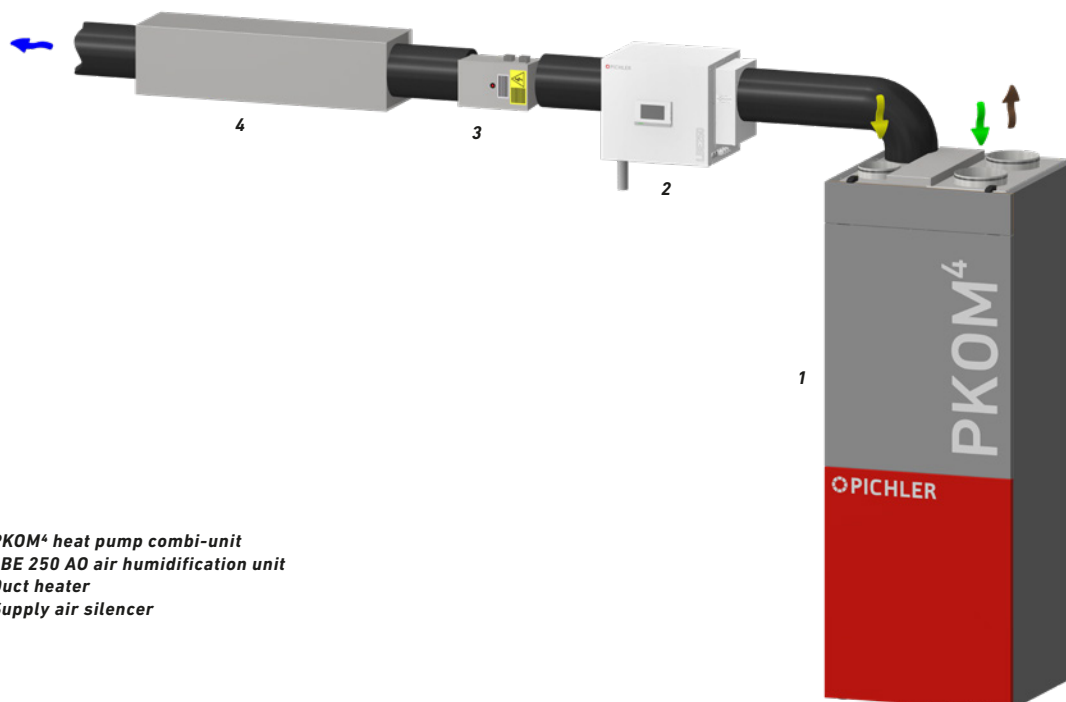

- 1 PKOM<sup>4</sup> heat pump combi-unit  
 2 LBE 250 AO air humidification unit  
 3 Duct heater  
 4 Supply air silencer



## Notes



## PKOM<sup>4</sup> trend at a glance!

- EC radial fans, speed controlled
- Filter ETA ISO ePM10 75% / Filter ODA ISO ePM1 55%
- Plastic counterflow heat exchanger or enthalpy exchanger
- Summer bypass flap to bypass the heat recovery (free cooling)
- Integrated heater using heat pump hot gas for protection against freezing
- Reversible cooling circuit design
- Frequency controlled rotating piston compressor for heating and cooling the supply air
- Electronic expansion valves
- TFT touch display with integrated room temperature sensor
- Integrated WEB server and LAN interface to local networks
- Smart Grid Ready (PV Ready)



## PKOM<sup>4</sup> classic at a glance!

### PROPERTIES IN ADDITION TO PKOM<sup>4</sup> TREND VERSION

- Additional cooling circuit with rotating piston compressor for household hot water heating
- Household hot water tank with PU hard foam insulation
- Optionally with additional heating battery (e.g. for solar connection, heating circuit connection)
- Corrosion protection through high quality enamelling in accordance with DIN 4753 and titanium impressed current anode
- Electrical heater for emergency operation or to assist in times of increased demand for hot water
- Patented two-circuit heat pump system



Your partner/installer:



Responsible for the content: J. Pichler Gesellschaft m.b.H. | Graphics and layout: WERK1  
Photos: J. Pichler Gesellschaft m.b.H. | Text: J. Pichler Gesellschaft m.b.H.  
All rights reserved | All photos are symbolic photos | Subject to change without notice | Version: 03/2025 en/p



**J. PICHLER**  
Gesellschaft m.b.H.  
office@pichlerluft.at  
www.pichlerluft.at

**AUSTRIA**  
**9021 KLAGENFURT**  
**AM WÖRTHERSEE**  
Karlweg 5  
T +43 (0)463 32769  
F +43 (0)463 37548

**AUSTRIA**  
**1100 WIEN**  
Doerenkampgasse 5  
T +43 (0)1 6880988  
F +43 (0)1 6880988-13

Sales offices in Germany,  
Slovenia and Serbia.  
Sales partners in Europe.